



Specification Sheet

9-5/8" Cased Hole Hydraulic - Packer Anchor



The XpressDrill™ wellbore departure system provides a reliable sidetrack across a wide variety of wellbore conditions and applications. Solid anchoring into the casing and isolation is achieved through the hydraulically set packer anchor. Bridge plugs, or other restrictions in the wellbore, are not required for successful operation. A 2.5-degree whipstock face ensures separation from the existing wellbore with minimal dogleg severity. The XpressMill™ milling assembly, dressed to full gauge with a combination of Premium PDC inserts and Tungsten Carbide, is designed to mill all casing grades and formations. Orientation can be achieved through MWD or Surface Read Gyro tools.

XpressDrill™ Whipstock Slide

Length	210.0"
Face Length	152.4"
OD	8.00"

Hydraulic Packer Anchor - XRP

Max Tool OD, in (retracted)	8.00"
Max Pressure Differential	5,000 psi
Length	91.5"
Push capacity, lbs.	150,000
Maximum torque, ft.lbf	30,000

Running Tool


Length	72.0"
OD	6.50"
Connection up/down	4-1/2 API IF BOX

By-Pass Value

Length	40.0"
OD	6.50"
Connection up/down	4-1/2 API IF BOX/ PIN

XpressMill™ Milling Assembly

Length	102.0"
Mill OD	8-3/8", 8-1/2" or 8-3/4"
Fishing Neck OD	6.50"
Connection up	4-1/2 API IF PIN

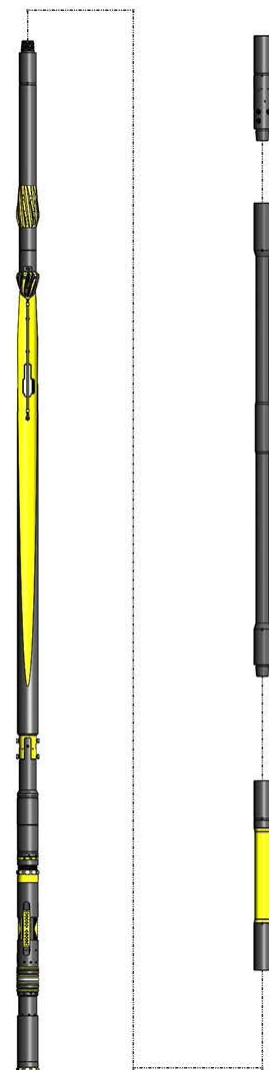



Specification Sheet

9-5/8" Cased Hole Hydraulic - Packer Anchor



The XpressDrill™ wellbore departure system provides a reliable sidetrack across a wide variety of wellbore conditions and applications. Solid anchoring into the casing and isolation is achieved through the hydraulically set packer anchor. Bridge plugs, or other restrictions in the wellbore, are not required for successful operation. A 2.5-degree whipstock face ensures separation from the existing wellbore with minimal dogleg severity. The XpressMill™ milling assembly, dressed to full gauge with a combination of Premium PDC inserts and Tungsten Carbide, is designed to mill all casing grades and formations. Orientation can be achieved through MWD or Surface Read Gyro tools.

XpressDrill™ Whipstock Slide

Length	210.0"
Face Length	152.4"
OD	8.00"

Hydraulic Packer Anchor - XRP

Max Tool OD, in (retracted)	8.00"
Max Pressure Differential	5,000 psi
Length	91.5"
Push capacity, lbs.	150,000
Maximum torque, ft.lbf	30,000

Running Tool

Length	72.0"
OD	6.50"
Connection up/down	4-1/2 API IF BOX

By-Pass Valve

Length	40.0"
OD	6.50"
Connection up/down	4-1/2 API IF BOX/ PIN

XpressMill™ Milling Assembly

Length	102.0"
Mill OD	8-3/8", 8-1/2" or 8-3/4"
Fishing Neck OD	6.50"
Connection up	4-1/2 API IF PIN

